



PLAN VIEW

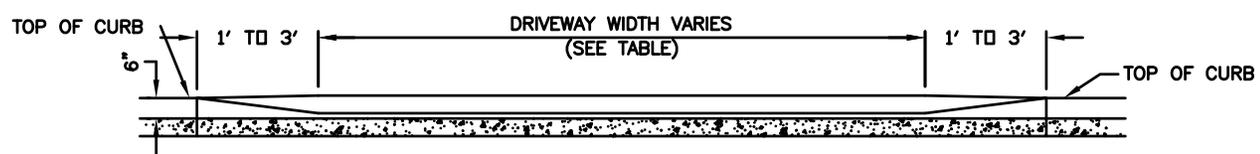

SECTION A - A

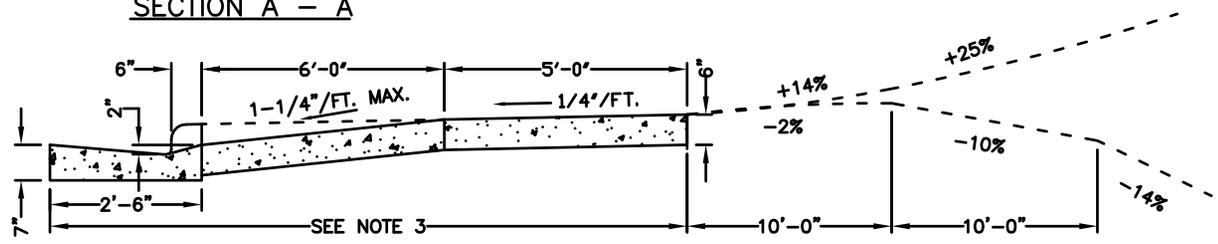

SECTION B - B

NOTES:

1. ALL CONCRETE TO BE 3600 P.S.I., 6" MIN. THICKNESS
2. ALL DRIVEWAYS MUST MEET THE CURRENT CITY DRIVEWAY REGULATIONS AND NCDOT REQUIREMENTS FOR SPACING, SIGHT DISTANCE AND OFFSETS FORM PROPERTY LINES AND INTERSECTIONS
3. ALL CURB OR CURB AND GUTTER AND SIDEWALKS ARE TO BE REMOVED TO THE NEAREST JOINT BEYOND NEW CONSTRUCTION OR CUT WITH A SAW AND REMOVED. SAW CUT OR JOINT TO BE PERPENDICULAR TO EDGE OF EXISTING PAVEMENT.
4. NO UTILITIES PERMITTED IN DRIVEWAYS.

DRIVEWAY CLASSIFICATION		
TYPE DRIVEWAY	MINIMUM	MAXIMUM
RESIDENTIAL	12'	20'
COMMERCIAL/INDUSTRIAL MULTI-FAMILY	24'	36'
COMMERCIAL/INDUSTRIAL ONE-WAY	15'	20'



**DRIVEWAY ENTRANCE
DROP CURB TYPE**

DATE: JULY 9, 2015
R-DR-02