


NOTES:

1. INSTALL AND MAINTAIN DRAINS IN LOW POINTS OF STREETS UNTIL FINAL 1" LIFT OF ASPHALT SURFACE COURSE IS PLACED.
2. FILL DRAINS WITH CONCRETE PRIOR TO PLACING FINAL 1" LIFT OF ASPHALT SURFACE COURSE.
3. DRAINS MAY BE CONSTRUCTED OF SCHEDULE 40 PVC, MINIMUM 3" DIAMETER.

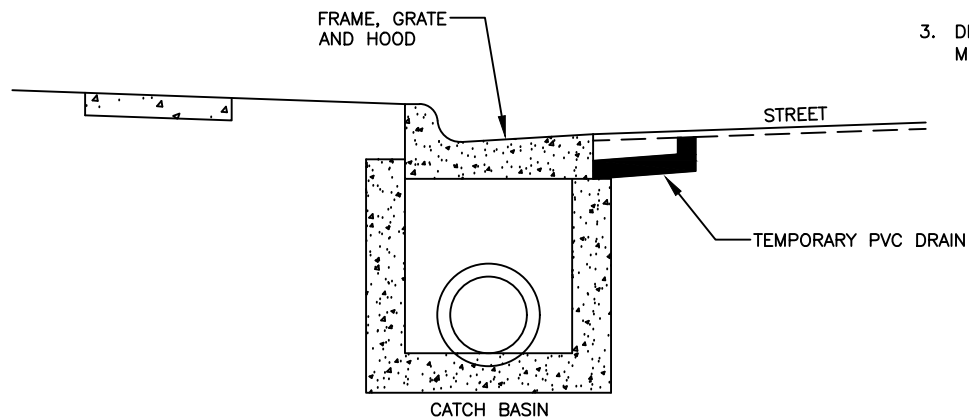

NOT TO SCALE