


TRAIL IN PARK SETTING

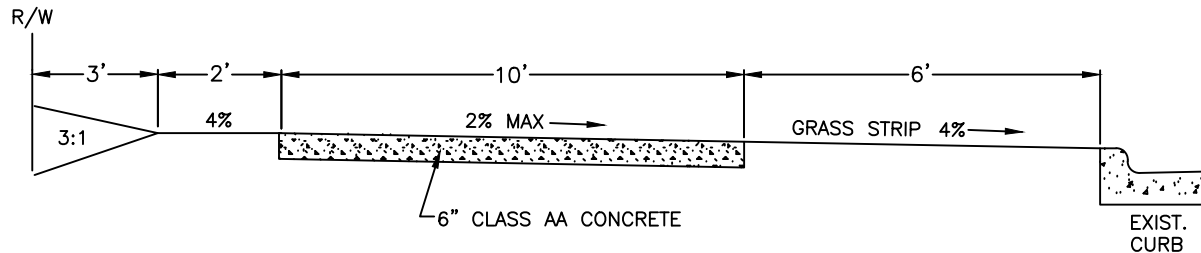

TRAIL PARALLEL TO STREET

NOTES:

1. MINIMUM WIDTH MUST BE MAINTAINED UNLESS LEGITIMATE CONSTRAINTS DICTATE OTHERWISE.
2. DIRECTION OF CROSS SLOPE FOR TRAIL IN PARK SETTING TO BE DETERMINED BY TOPOGRAPHICAL CONDITIONS.
3. CONCRETE MUST BE REINFORCED IF ANY VEHICULAR TRAFFIC FOR MAINTENANCE OR ANY OTHER PURPOSE IS ANTICIPATED.
4. FOR TRAIL NEXT TO ROADWAY, THE AASHTO RECOMMENDED MINIMUM GRASS STRIP BETWEEN THE TRAIL AND CURB IS 6 FEET. IF CONSTRAINTS PROHIBIT A 6' GRASS STRIP, THEN A PHYSICAL BARRIER OR RAILING SHOULD BE PROVIDED PER AASHTO.
5. GREENWAY TRAILS SHALL MEET ADA STANDARDS TO THE GREATEST EXTENT POSSIBLE.
6. SUBGRADE SHALL BE PROOF-ROLLED AND APPROVED BY CITY INSPECTOR PRIOR TO PAVING.
7. EDGES OF TRAIL SHALL BE A MINIMUM DISTANCE OF 5' FROM TREES, MANHOLES AND OTHER UTILITIES.
8. MINIMUM CL RADIUS OF 50'
9. TREES SHALL BE TRIMMED UP TO 10' ABOVE THE FINISHED TRAIL GRADE AND WITHIN 10' HORIZONTALLY FROM THE TRAIL EDGES.
10. DANGEROUS TREE LIMBS OVER THE TRAIL AND DEAD TREES NEAR THE TRAIL SHALL BE REMOVED AS DIRECTED BY THE CITY.

NOT TO SCALE